VULKEM® EWS UNDER TILE SYSTEM

Designed for use under tile, pavers and bonded overburden

Features & Benefits

- Minimal downtime (45 minutes) between application coats
- Fast turn-around time. Apply overburden in 1 hour
- Polyurethane-methacrylate (PUMA) technology delivers extreme durability and crack bridging capabilities
- Chemically resistant
- Can be applied in temperatures as low as 14° F (-10° C)

Basic Uses

- Tile
- Pavers
- Bonded Overburden




Vulkem® EWS Under Tile System Application





Vulkem EWS Under Tile System

PRODUCT	COVERAGE RATE	WET MILS	COMMENTS
1: Tremco PUMA Primer	90 ft²/gal	17	Lightly broadcast silica sand.
2: Tremco PUMA BC	20 ft²/gal	80	Allow 45 min to cure before proceeding.
3: Tremco PUMA TC	53 to 90 ft²/gal	17 to 30	Lightly broadcast silica sand.
4: Overburden	N/A	N/A	Tile or pavers

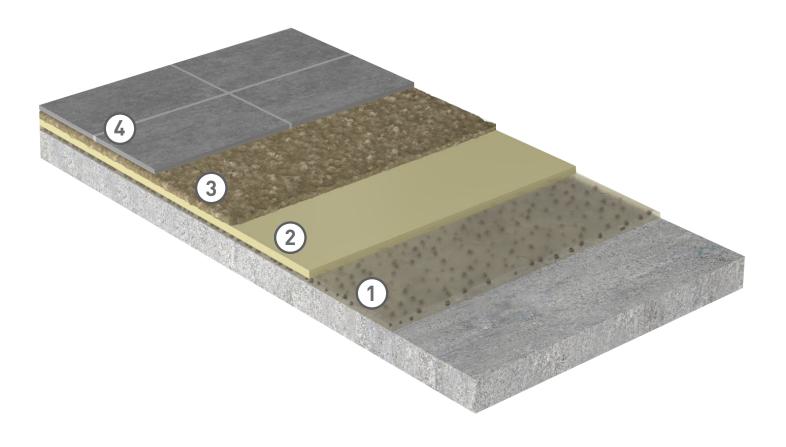

Information may vary by region. For specific information, please reference the application instructions or contact your local Tremco representative.

Tremco Commercial Sealants & Waterproofing | 3735 Green Road | Beachwood, OH 44122 | US: 800.852.9068 | CAN: 800.363.3213 | tremcosealants.com

Tremco Construction Products Group (CPG) brings together Tremco Incorporated's Commercial Sealants & Waterproofing and Roofing & Building Maintenance operating divisions; Dryvit Systems, Inc.; Nudura Inc.; Willseal; Weatherproofing Technologies, Inc. and Weatherproofing Technologies Canada, Inc.

